

Part No. 17MOMMS402

Micro-miniature Pushbutton Switches




SPECIFICATIONS

CONTACT RATING:Q: 500mA @120 VAC or 28 VDC
 ELECTRICAL LIFE:30,000 make-and-break cycles at full load
 CONTACT RESISTANCE: 20 mΩ max. initial @2-4 VDC,100 mA
 INSULATION RESISTANCE: 1,000 MΩ min.
 DIELECTRIC STRENGTH: 500 V RMS @ sea level.
 OPERATING TEMPERATURE: -30°C to 85°C

MATERIALS

Base - diallyl phthalate (DAP) (UL94V-0)
 Plunger -Glass filled Nylon(UL94V-0)
 Bushing -Copper alloy , nickel plated
 CONTACT AND TERMINAL - Copper alloy , silver plated

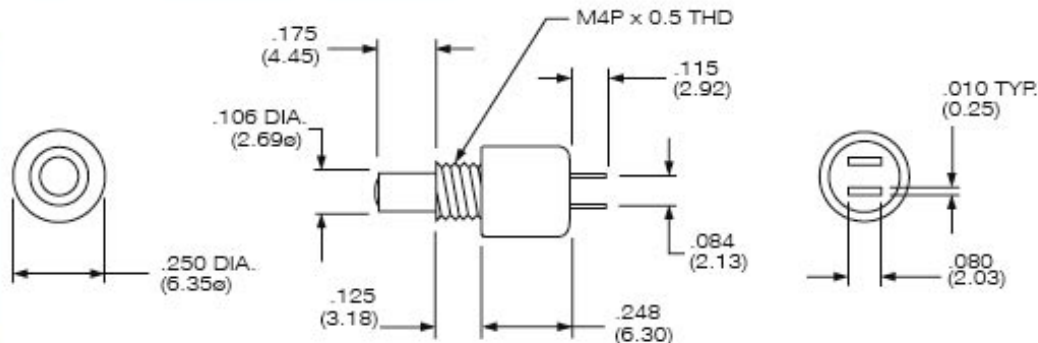

	SWITCH FUNCTION	
	POS. 1	POS. 2
	OFF	MOM.

Schematic:

N.O.
 Total Travel: .040 (1.02) typ.
 Actuation Force: 5 OZ. (140g) typ.
 MOM = Momentary

CONTACT MATERIAL OPTIONS

CODE	CONTACT MATERIAL	TERMINAL MATERIAL	RATING
Q	Silver plated	Silver plated	500mA @ 120 V AC or 28 V DC