

17MOMR1821A / 17MOMR1821B

SPECIFICATIONS



CONTACT RESISTANCE: 30mΩ max
 INSULATION RESISTANCE: DC 500V 100MΩ min
 DIELECTRIC STRENGTH: AC 1000V 1 minute
 ELECTRICAL LIFE: 30,000 cycles min
 MECHANICAL LIFE: 50,000 cycles min
 TERMINAL MATERIAL: Copper alloy,
 silver or gold plated

*RoHS Compliant:

3A 125V AC



Model No.	TYPE
R18-21A	OFF-ON
R18-21B	OFF-(ON)
R18-21C	ON-(OFF)

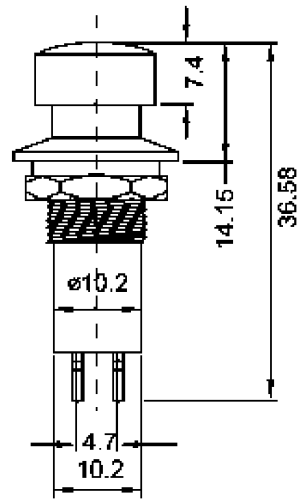

3A 125V AC



Model No.	TYPE
R18-23A	OFF-ON
R18-23B	OFF-(ON)
R18-23C	ON-(OFF)

