



Dimensions: mm (In.)



POS. 1	POS. 2
ON	MOM
2-1	2-3

SWITCH FUNCTION

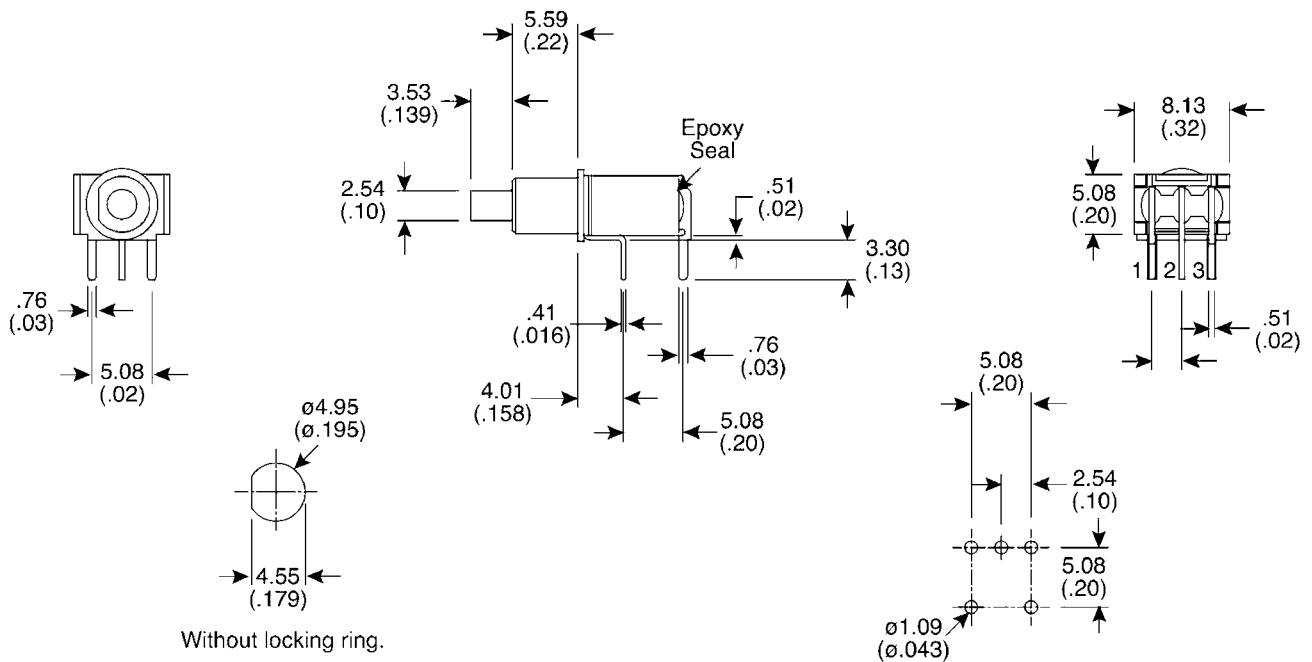

Without locking ring.

PANEL MOUNTING

P.C. MOUNTING

Electrical Specifications:

- Rating: 1/250VAC, 3/120VAC or 28 VDC
- Contact Resistance: 20mΩmax. initial @ 2-4VDC 100mA
- Insulation Resistance: 1,000MΩmin.
- Dielectric Strength: 1,000 V RMS@ sea level

Mechanical Specifications:

- Mechanical Life: 60,000 make-and-break cycles.
- Operating Temperature: -30°C to 85°C

Materials:

- Case: Diallyl phthalate (DAP) (UL94V-0)
- Plunger: Thermoplastic Polyester-black
- Bushing: Brass, nickel plated.
- Housing: Stainless steel
- Contact: Brass, silver or gold plated.
- Terminal: Brass, Silver plated.
- Terminal Support: Brass, tin plated.

Note:

- RoHS compliant by exemption